


# Termocoppia con guaine in ceramica, inserto MgO Ø 6 mm e connettore compensato

Thermocouple with ceramic protection tube, Ø 6 mm MgO insert and compensated connector



Tolleranza termoelemento secondo la norma CEI EN 60584-1 Classe 1  
Tolerances thermoelement according to CEI EN 60584-1 Class 1  
Tolleranze dimensionali +/- 3% - Dimensional tolerances +/- 3%

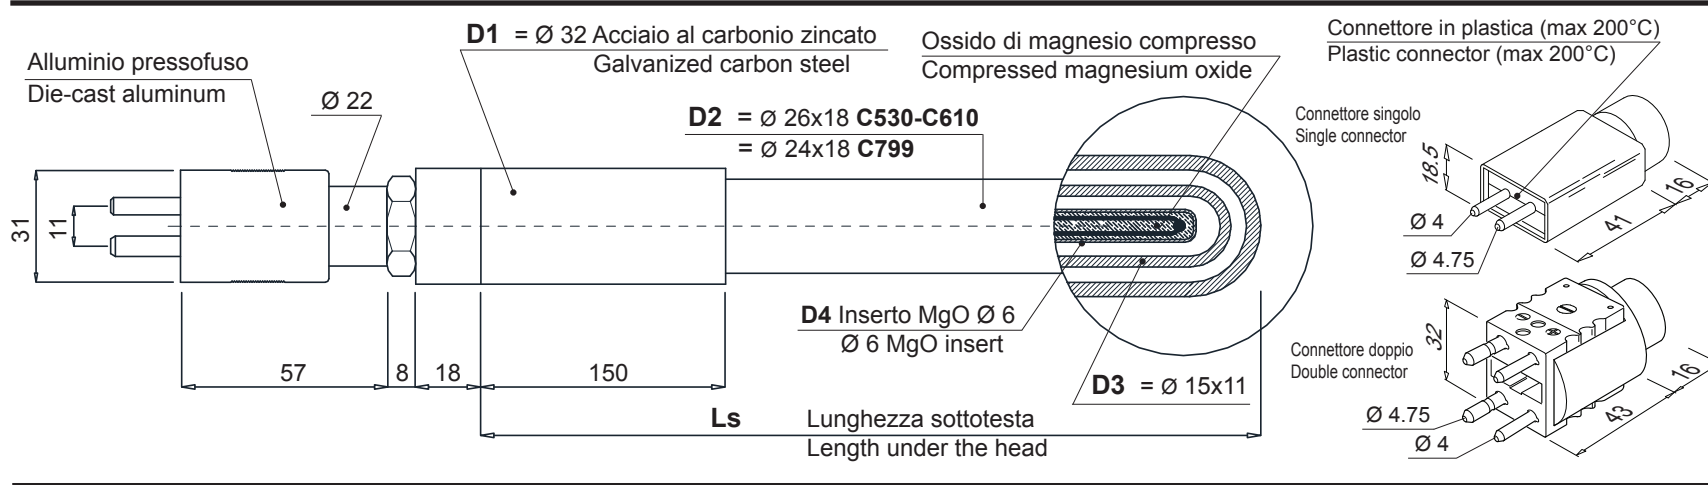

Lunghezza Ls Length	
04	200 mm
05	250 mm
06	300 mm
07	350 mm
08	400 mm
09	450 mm
10	500 mm
11	550 mm
12	600 mm
13	650 mm
14	700 mm
15	750 mm
16	800 mm
17	850 mm
18	900 mm
19	950 mm
20	1000 mm
21	1050 mm
22	1100 mm
23	1150 mm
24	1200 mm
25	1250 mm
26	1300 mm
27	1350 mm
28	1400 mm
29	1450 mm
30	1500 mm
31	1550 mm
32	1600 mm
33	1650 mm
34	1700 mm
35	1750 mm
36	1800 mm
37	1850 mm
38	1900 mm
39	1950 mm
40	2000 mm

Tutte le quote sono espresse in mm  
All dimensions are in millimeters

### Guaine di protezione Protection tube

Guaina esterna Outer protection tube (D2)	C 530 (AL203 75%) (EN.60.672-DIN VDE 0335)	C 610 (AL203 60%) (EN.60.672-DIN VDE 0335)	C 530 (AL203 75%) (EN.60.672-DIN VDE 0335)	C 610 (AL203 60%) (EN.60.672-DIN VDE 0335)	C 530 (AL203 75%) (EN.60.672-DIN VDE 0335)	C 610 (AL203 60%) (EN.60.672-DIN VDE 0335)	C 799 (AL203 99.7%) (EN.60.672-DIN VDE 0335)	C 799 (AL203 99.7%) (EN.60.672-DIN VDE 0335)
Guaina interna Inner protection tube (D3)	-	-	C 610 (AL203 60%) (EN.60.672-DIN VDE 0335)	C 610 (AL203 60%) (EN.60.672-DIN VDE 0335)	C 799 (AL203 99.7%) (EN.60.672-DIN VDE 0335)	C 799 (AL203 99.7%) (EN.60.672-DIN VDE 0335)	-	C 799 (AL203 99.7%) (EN.60.672-DIN VDE 0335)
	80	81	82	83	84	85	86	87

### Opzioni canotto (D1) Rod options

Materiale canotto Rod material		02	100 mm
A	Acciaio al carbonio zincato Galvanized carbon steel (standard)	03	150 mm
		04	200 mm
		05	250 mm
		06	300 mm
		07	350 mm
I	Acciaio inox aisi 310 Stainless steel aisi 310	08	400 mm
		09	450 mm
		10	500 mm

### Massime temperature di lavoro continuo consigliate °C Advised maximum continuous operating temperatures °C

	Singolo elemento Single element		Doppio elemento Double element	
	Ø D3		Ø 6	
K (NiCr-Ni)	1100°C		1080°C	
N (Nicrosil-Nisil)	1100°C		1090°C	

### Tipo termocoppia Thermocouple type


K (NiCr-Ni)	N (Nicrosil-Nisil)
2	3

### Termoelemento Thermoelement

Singolo (2 fili) Single	Doppio (4 fili) Double
1	2

Esempio di ordine: Cod. **T6580.021.0008 + CA3202** Termocoppia tipo "K", guaina esterna C530, termoelemento singolo, lunghezza sottotesta 400 mm + opz. canotto in acciaio al carbonio L=100 mm.  
Ordering example: Cod. **T6580.021.0008 + CA3202** "K" type thermocouple, outer protection tube C530, single thermoelement, length under the head 400 mm + opt. galvanized carbon steel rod L=100 mm

### Installazione consigliata / Recommended installation

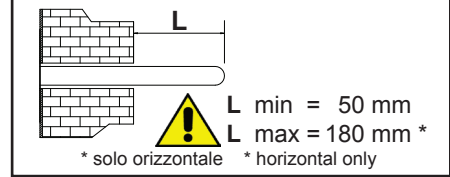

VEGA s.r.l. mail@vegacer.com  
Via Industria, 14 - Z.I. Scovizze Ph. +39 0444976414  
36033 Isola Vicentina (VI) - ITALY Fax +39 0444809124